


# Dixell Temperatuurmeter


## TYPE XT110C / XT111C (Ééntrapsregelaar)



Aansluitschema:

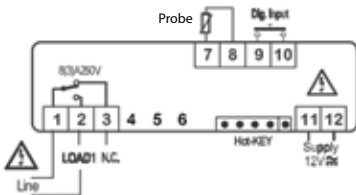

Probe: Pt100= 7 - 9 (S); Thermocouple J, K, S = 7(+)- 9(-)  
24Vac/dc supply: 11-12

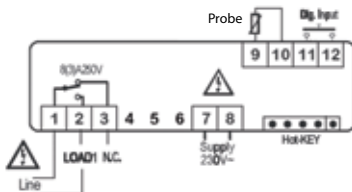

Pt100=9-11 (10); Thermocouple J, K, S = 9(+)- 11(-)  
115Vac supply: 7-8

| code Nr. | artikel      | voeding  | alarmuitgang | prijs € | vpe |
|----------|--------------|----------|--------------|---------|-----|
| 10004    | XT110C-0C0TU | 12VAC/DC | NEE          | 92,34   | 1st |
| 10206    | XT110C-1C0TU | 24VAC/DC | NEE          | 100,94  | 1st |
| 10015    | XT110C-5C0TU | 230VAC   | NEE          | 95,28   | 1st |
| 10007    | XT111C-0C0TU | 12VAC/DC | JA           | 96,67   | 1st |
| 10008    | XT111C-1C0TU | 24VAC/DC | JA           | 99,40   | 1st |
| 10017    | XT111C-5C0TU | 230VAC   | JA           | 101,46  | 1st |

### Kenmerken:

Eéntraps thermostaat voor inbouw

Afmetingen 32x74x60mm

Geïntegreerde meeteenheid

Display: 3 Digits + DP

Keuze van het type aangesloten sonde (PTC/NTC/PT100/TC) via parameter

Front IP65

Standaard met TTL aansluiting voor Hotkey Programming

Middels module XJ485; RS485 voor aansluiting op

supervisie-systeem

Universele ingang: PTC / NTC / PT100 / TC